



SPECIFICATION SHEET

UMACABLE HIGH QUALITY DISPLAYPORT TO VGA ADAPTER


ITEM NO.: UMDP1302




KEY FEATURES :

- Connect the video output of a DisplayPort enabled Chromebook or laptop to a VGA display
- Convert DisplayPort digital signal to VGA analog signal
- Support 1920x1080@60 (1080p Full HD) resolution
- Feature a built-in active IC chip to achieve better compatibility
- Lifetime Warranty


UMACABLE HIGH QUALITY DISPLAYPORT TO VGA ADAPTER

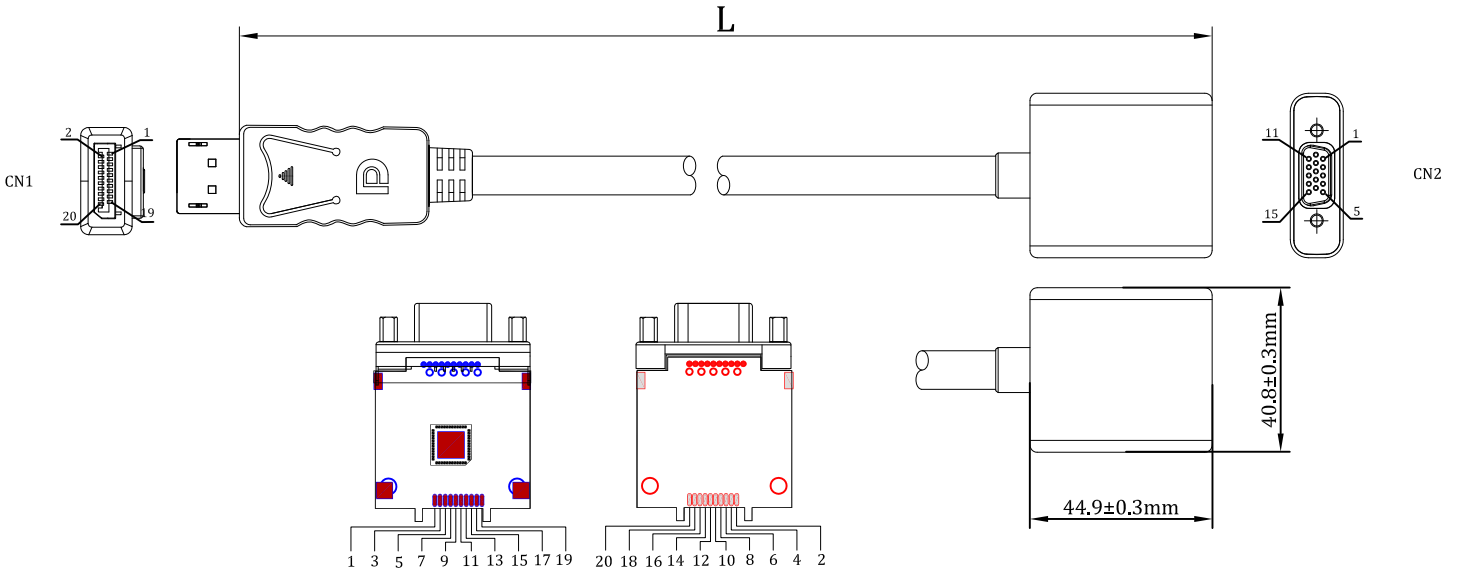

Diagram

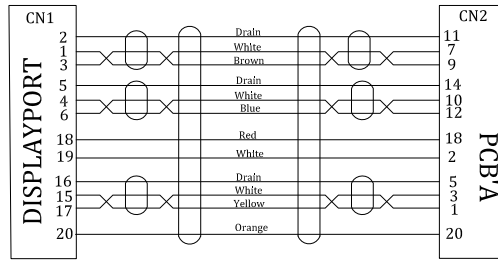

Construction

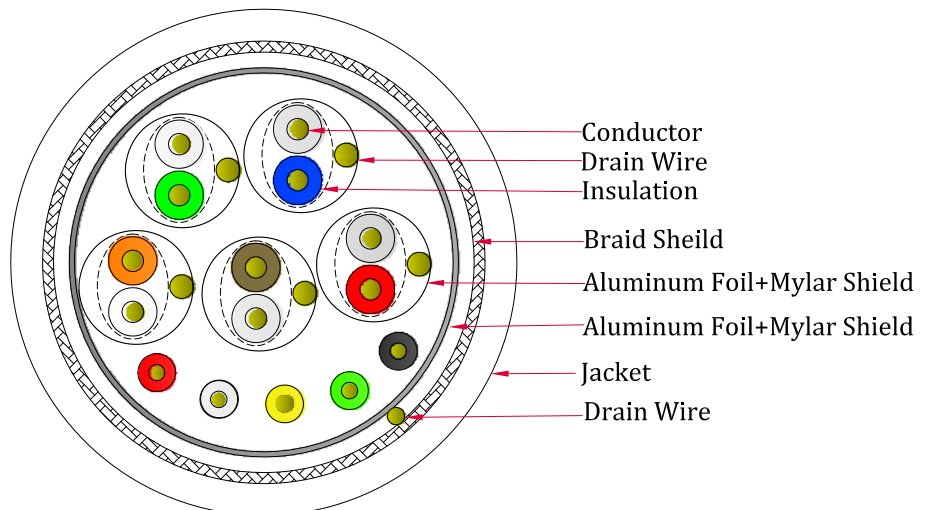

UMACABLE HIGH QUALITY DISPLAYPORT TO VGA ADAPTER

Electrical Characteristics:

Nominal Impedance:	100±10Ω
Voltage:	5V, 500mA
DC Resistance:	376Ω/km
Pixel Clock Rate:	Up to 165MHz
Intra-pair Skew:	15ps/m max

Physical Characteristics:

Voltage Rating:	30V
Minimum Bend Radius:	12mm
Temperature Rating:	80℃
Approvals:	RoHS Compliant
Package type:	PE bag, Zip bag, Box, Hang card, Blister

Conductor 1 (5 pairs)

Conductor Type:	32AWG Tinned Copper
Insulation:	Foamed PE
Color:	Brown/White, Yellow/White, Green White, Blue/White, Red/White
Drain Wire:	32AWG Tinned Copper
Shield:	Aluminum Foil+Mylar 100% Coverage

Conduct 2 (5 cores)

Conductor Type:	32AWG Tinned Copper
Insulation:	HDPE
Color:	White, Red, Black, Yellow, Orange
Shield:	Aluminum Foil+Mylar 100% Coverage

Connector 1

Connector Type:	DisplayPort Male
PIN Construction:	Phosphor Copper
Plating:	1 μm Gold
Injection:	ABS

Connector 2

Connector Type:	VGA Female
PIN Construction:	Phosphor Copper
Plating:	1 μm Gold
Injection:	ABS

Overall

Drain Wire:	28AWG Bare Copper
Foil Shield:	Aluminum Foil+Mylar 100% Coverage
Braided Shield:	16/6/0.12 Aluminum Magnesium
Jacket:	PVC
OD:	5.5±0.2mm

Customized Parameters

Guage:	AWG 32
Length:	0.2m
Color:	Black or Customized
Ferrite Core:	Customized
Nylon Mesh:	Customized
Package type:	PE bag, Zip bag, Box, Hang card, Blister