



SPECIFICATION SHEET

UMACABLE HIGH QUALITY CAT5E U/UTP CROSSOVER PATCH CABLE

ITEM NO.: UMNW2006




KEY FEATURES :


- High Quality CAT5E U/UTP Unshielded Crossover Patch Cable
- Easily to transfer files and data between two computers
- Meets or exceeds TIA/EIA-568-C.2 and ISO/IEC 11801 Specification
- Provides outstanding transmission performance and low signal losses
- Tested to 350 MHz and support 1000 Base-T Gigabit Ethernet
- Lifetime Warranty

UMACABLE HIGH QUALITY CAT5E U/UTP CROSSOVER PATCH CABLE


UMACABLE HIGH QUALITY CAT5E U/UTP CROSSOVER PATCH CABLE

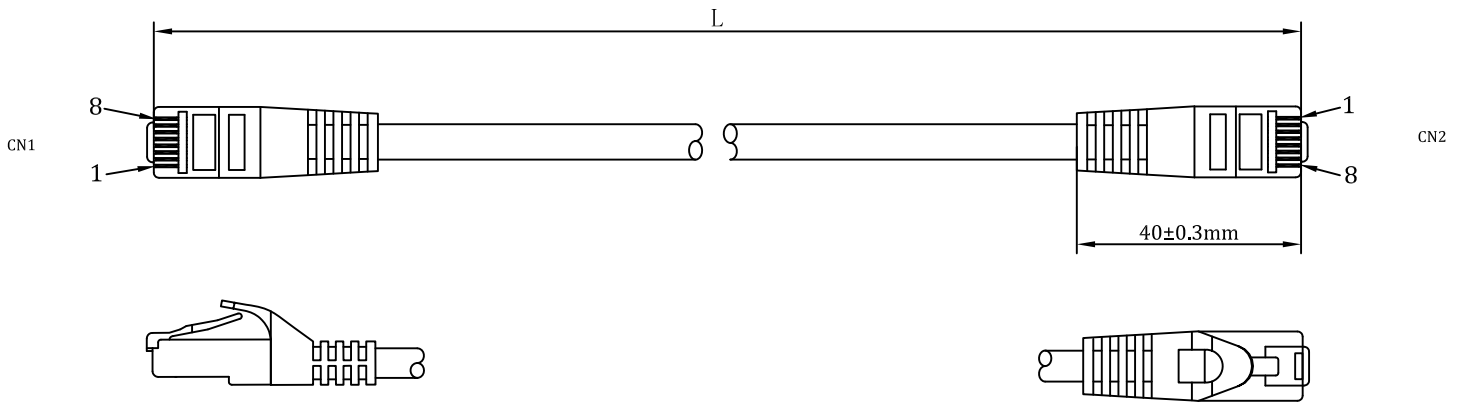

Diagram

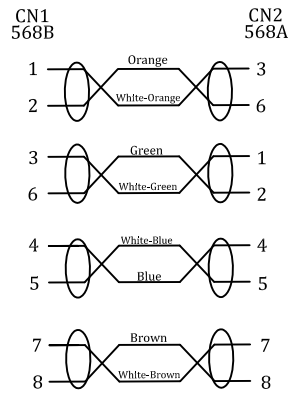

Construction

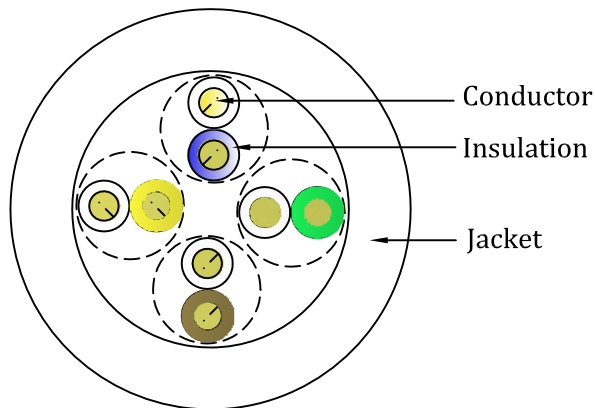

Electrical Characteristics:

Conductor DC Resistance:	89 Ohm/km (maximum)
Insulation Resistance :	100 Ohm/km (minimum)
Dielectric Strength:	500 MV/m
Propagation Delay:	545ns/100m (maximum)
Delay Skew:	45ns/100m (maximum)

Conductors (4 pairs)

Conductor Type:	24AWG Solid Bare Copper
Insulation:	HDPE
Color:	White-Orange/Orange, White-Green/Green White-Blue/Blue, White-Brown/Brown

Customized Parameters

Guage:	AWG 28, 26, 24
Length:	1, 2, 3, 5, 10m
Color:	Customized
Package type:	PE bag, Zip bag, Box, Hang card, Blister

Physical Characteristics:

Voltage Rating:	30V
Temperature Rating:	80°C
Operating Temperature Range:	-20°C - 80°C
Storage Temperature Range:	-25°C - 85°C
Approvals:	RoHS, CE, UL Compliant

Overall

Jacket:	PVC, LSZH, LDPE, CMX, C
OD:	5.2±0.2mm