



## SPECIFICATION SHEET

### UMACABLE HIGH QUALITY USB 2.0 B FEMALE TO A FEMALE PANEL MOUNT ADAPTER


ITEM NO.: UMPM6001




#### KEY FEATURES :

- High Speed USB 2.0 B Female to A Female Panel Mount Adapter
- The screw design helps to connect the device tightly
- Convenient way to combine two USB cables through a panel without any signal loss
- Support high speed USB 2.0 devices and the transfer rate reaches to 480 Mbps
- Backward compliant with full-speed USB 1.1 (12 Mbps) and low speed USB 1.0 (1.5 Mbps)
- Lifetime Warranty

UMACABLE HIGH QUALITY USB 2.0 B FEMALE TO A FEMALE PANEL MOUNT ADAPTER

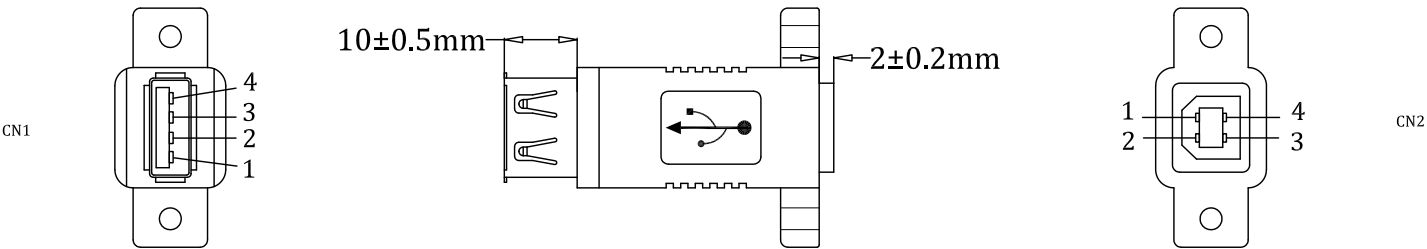

Diagram



# UMACABLE HIGH QUALITY USB 2.0 B FEMALE TO A FEMALE PANEL MOUNT ADAPTER

## Electrical Characteristics:

Open/Short/Intermittence:	100%
Hi-Pot:	AV 150V, 0.01S
Insulation Resistance:	DC 200V, 0.01S, 10MΩ(Min)
Conductive Resistance:	2 OHM (Max)

## Physical Characteristics:

Operating Temperature Range:	-20℃ - 80℃
Storage Temperature Range:	-25℃ - 85℃
Approvals:	RoHS Compliant
Package type:	PE bag, Zip bag, Box, Hang card, Blister

## Conductor (4 Cores)

Conductor Type:	28AWG Tinned Copper
Insulation:	Foamed PE

## Overall

Drain Wire:	28AWG Tinned Copper
-------------	---------------------

## Connector 1

Connector Type:	USB 2.0 B Female
PIN Construction:	Phosphor Copper
Plating:	Nickel
Injection:	45P PVC

## Connector 2

Connector Type:	USB 2.0 A Female
PIN Construction:	Phosphor Copper
Plating:	Nickel
Injection:	45P PVC

## Customized Parameters

Guage:	28AWG, 26AWG
Color:	Black or Customized
Package type:	PE bag, Zip bag, Box, Hang card, Blister