



SPECIFICATION SHEET

CAT5E U/UTP MALE TO FEMALE PANEL MOUNT EXTENSION CABLE


ITEM NO.: UMPM7006




KEY FEATURES :

- High Quality CAT5E U/UTP Shielded Male to Female Panel Mount Extension Cable
- The screw design helps to connect the device tightly
- Convenient way to extend the connection between all kinds of LAN network components through a p.
- Meets or exceeds TIA/EIA -568-C.2 and ISO/IEC 11801 Specification
- Provides outstanding transmission performance and low signal loss
- Tested to 350 MHz and support 1000 Base-T Gigabit Ethernet
- Lifetime Warranty


CAT5E U/UTP MALE TO FEMALE PANEL MOUNT EXTENSION CABLE

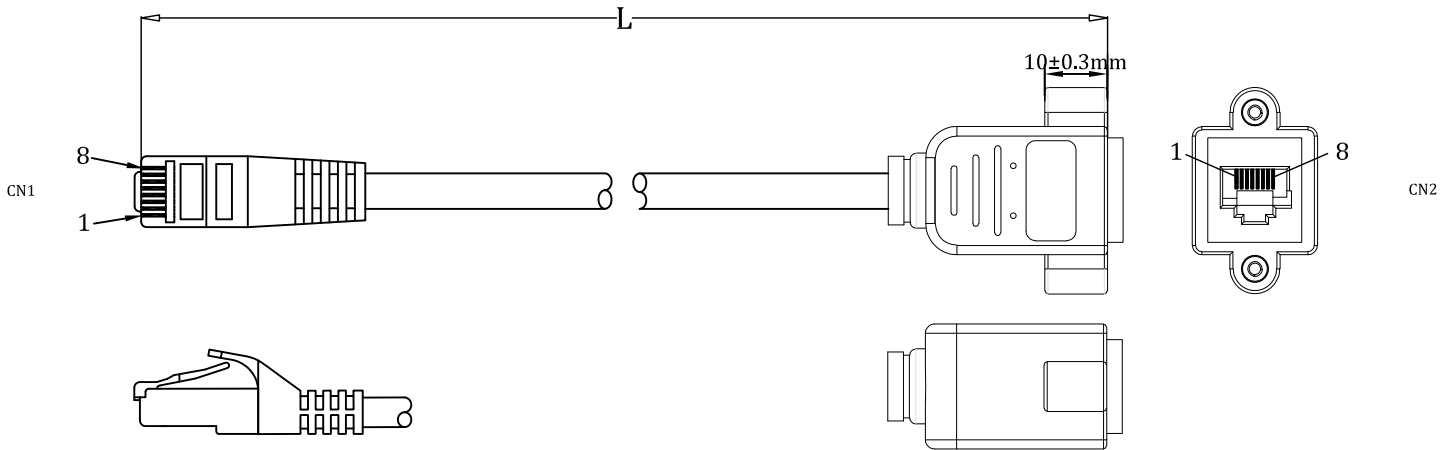

Diagram

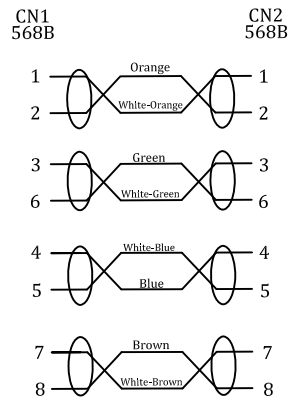

Construction

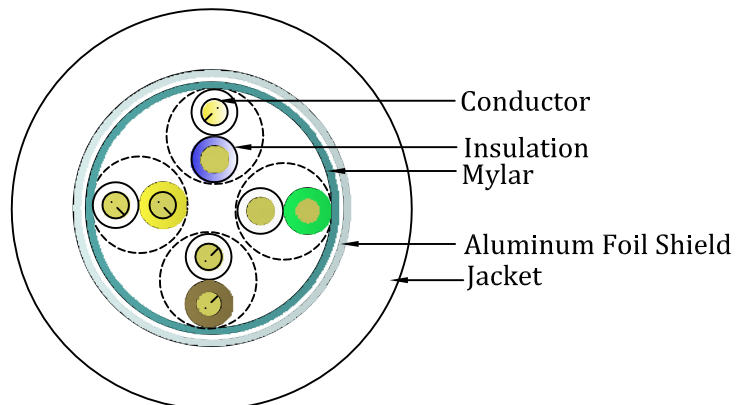

CAT5E U/UTP MALE TO FEMALE PANEL MOUNT EXTENSION CABLE

Electrical Characteristics:

Conductor DC Resistance:	89 Ohm/km (maximum)
Insulation Resistance :	100 Ohm/km (minimum)
Dielectric Strength:	500 MV/m
Propagation Delay:	545ns/100m (maximum)
Delay Skew:	45ns/100m (maximum)

Physical Characteristics:

Voltage Rating:	30V
Temperature Rating:	80°C
Operating Temperature R-	-20°C - 80°C
Storage Temperature Rar-	-25°C - 85°C
Approvals:	RoHS, CE, UL Compliant

Conductors (4 pairs)

Conductor Type:	24AWG Bare Copper
Insulation:	HDPE
Color:	White-Orange/Orange, White-Green/Green White-Blue/Blue, White-Brown/Brown

Overall

Jacket:	PVC, LSZH, LDPE, CMX, CM, CMR, CMP
OD:	5.2±0.2mm
Connector 1:	CAT5E U/UTP Male
Connector 2:	CAT5E U/UTP Female

Customized Parameters

Guage:	AWG 28, 26, 24
Length:	0.2, 0.5, 1, 2, 3, 5, 10, 20m
Color:	Customized
Package type:	PE bag, Zip bag, Box, Hang card, Blist