

SPECIFICATION SHEET

UMACABLE HIGH QUALITY USB 2.0 TYPE C MALE TO TYPE A MALE CABLE

ITEM NO.: UMUB3002






KEY FEATURES:

- High Speed USB 2.0 Type C (USB-C) Male to Type A (USB-A) Male Cable
- Reversible USB-C Connector allows for plugging in any way
- Support up to 3 Amps of charging power for mobile devices and all USB-C compatible devices
- Backward compliant with full-speed USB 1.1 (12 Mbps) and low speed USB 1.0 (1.5 Mbps)
- Flexible PVC jacket, Foil and braid shielding, and the twisted pair construction make a better performance
- Lifetime Warranty

UMACABLE HIGH QUALITY USB 2.0 TYPE C MALE TO TYPE A MALE CABLE

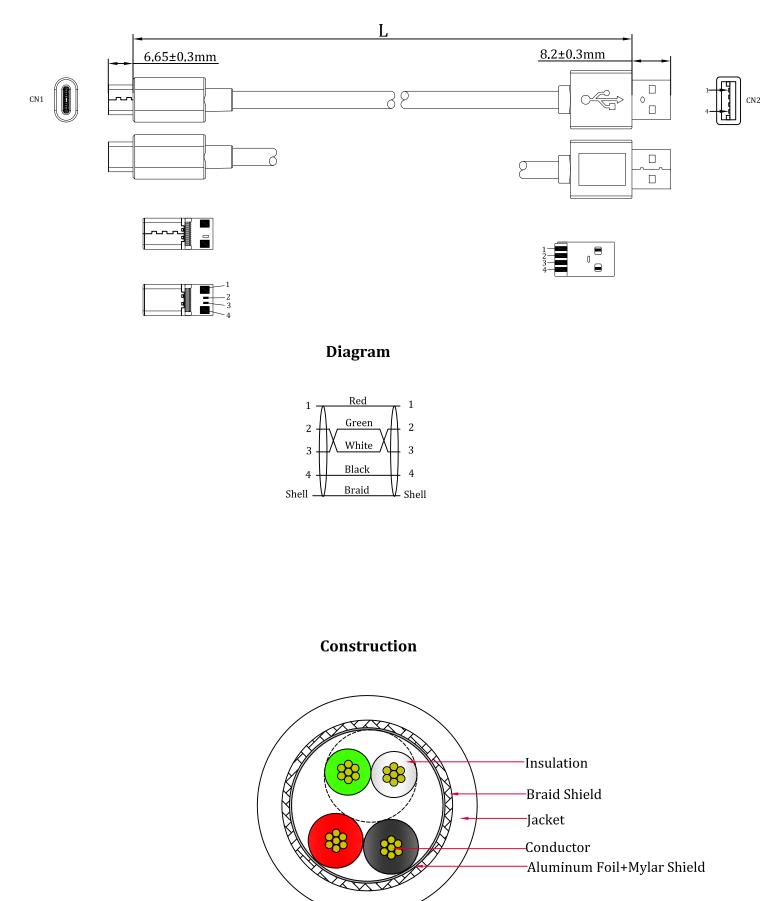

Electrical Characteristics:

Diffierential Impedance: Propagation Delay: Skew: Dielectric Strength: Insulation Resistance: 90±13.5 ohms 5.2ns/m(Max), 26ns/cable 100ps/cable(max) AC 500V/1 minute 10MΩ

Conductor 1 (1 pairs)

Conductor Type: Insulation: Color: Shield: 28AWG Bare Copper Foamed PE Green/White Aluminum Foil+Mylar 100% Coverage

USB 2.0 Type C Male

Phosphor Copper

Nickel

45P PVC

Connector 1

Connector Type: PIN Construction: Plating: Injection:

Overall

Foil Shield:

Braided Shield: Jacket: OD: Aluminum Foil+Mylar 100% Coverage 16/3/0.12 Aluminum Magnesium PVC 3.8±0.2mm

Physical Characteristics:

Voltage Rating:	30V
Maximum Bend Radius:	90mm
Temperature Rating:	80 °C
Approvals:	RoHS Compliant
Packagte type:	PE bag, Zip bag, Box, Hang card, Blister

Conduct 2 (2 cores)

Conductor Type:	28AWG Bare Copper
Insulation:	HDPE
Color:	Red, Black
Shield:	Aluminum Foil+Mylar
	100% Coverage

Connector 2

Connector Type:	USB 2.0 Type A Male
PIN Construction:	Phosphor Copper
Plating:	Nickel
Injection:	45P PVC

Customized Parameters

Guage:	AWG 28/28
Length:	0.5, 1, 1.5, 1.8, 2, 3m
Color:	Black or Customized
Ferrite Core:	Customized
Nylon Mesh:	Customized
Packagte type:	PE bag, Zip bag, Box, Hang card, Blister