



RoHS Compliant

| Rev | Modification | Date |
|-----|--------------|------------|
| A1 | Issue | 07/13/2016 |




Key Features:

- High Quality 3.5mm Female to Female Panel Mount cable
- The screw design helps to connect the device tightly
- Convenient way to combine two 3.5mm Stereo cables through a panel without any signal loss
- Seamlessly transmits stereo audio for high quality sound while ensuring reliability and reducing signal loss and noise
- Flexible PVC jacket and bare copper conductors make a better performance
- Lifetime Warranty


| | | |
|---|---------------------|--|
| Projection:  | Tolerance: XX= XXX= | Product: 3.5mm F/F Panel Mount Cable |
| Scale: None | DWG No.: PM1003 | Part No.: UMPM1003 |
| Unit: mm | Page: 1/2 | Customer: |
| Customer Approve: | | UMA Technology Co., Ltd Tel: 0086 574 8704 2335 Fax: 0086 574 5687 7589 Email: info@umateck.com Web: www.umateck.com Add: 4-1, Shanghai Fortune building, South Dongyi Rd, Zhenhai District, Ningbo, China, 315202  |
| Approve: | Dell Zheng | |
| Check: | Kelly Xu | |
| Draw: | David Han | |

RoHS Compliant

| | | |
|-----|--------------|------------|
| Rev | Modification | Date |
| A1 | Issue | 07/13/2016 |

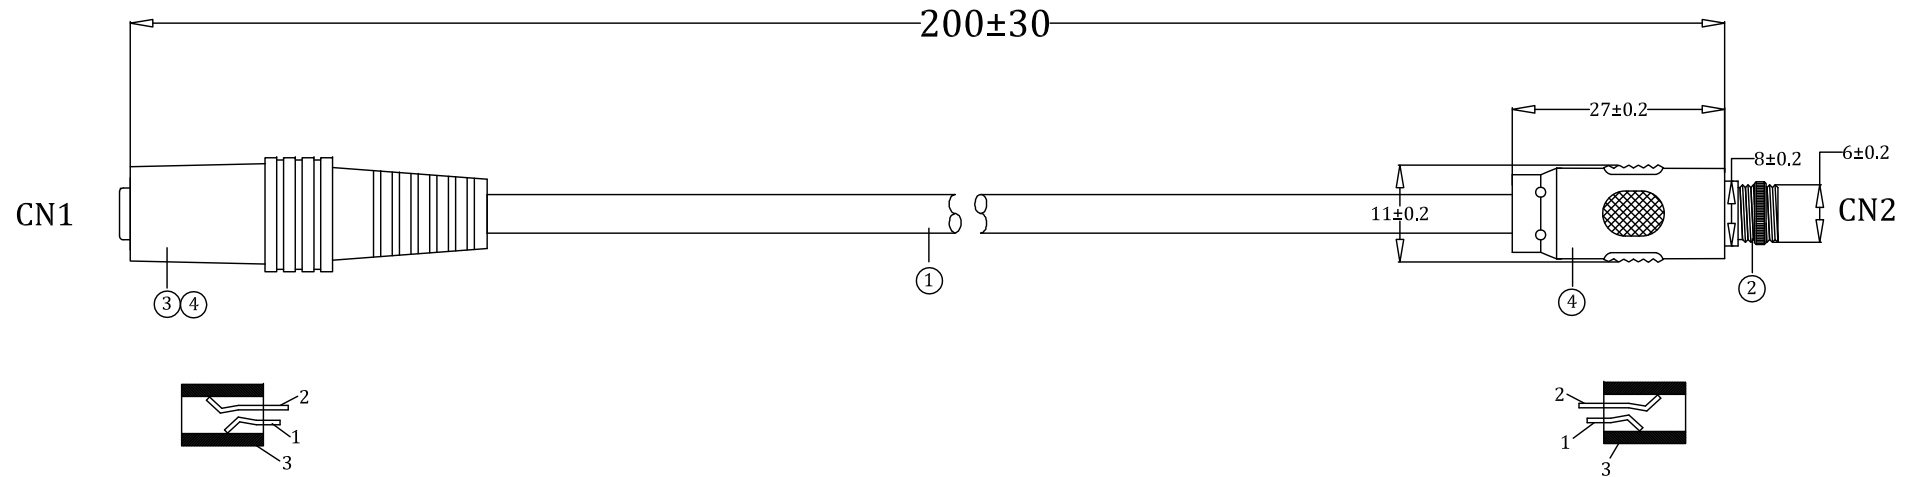

PIN OUT



Electronic Tests:

- A. Open/Short/Intermittence: 100%
- B. Hi-Pot: AC 300V 0.01S
- C. Insulation Resistance: DC 300V 5MΩ
- D. Conductive Resistance: 3Ω Max

| | | | | | | | |
|-----|------------|---|------|------|-------------------|---------------------|---|
| | | | | | Projection: | Tolerance: XX= XXX= | Product: 3.5mm F/F Panel Mount Cable |
| ⑤ | Outer Mold | 45P PVC, Black | 8 | g | Scale: None | DWG No.: PM1003 | Part No.: UMPM1003 |
| ④ | Inner Mold | LDPE | 4 | g | Unit: mm | Page: 2/2 | Customer: |
| ③ | Connector | 3.5mm Female, PIN and Shell Nickel Plated | 1 | pc | Customer Approve: | | UMA Technology Co., Ltd Tel: 0086 574 8704 2335 Fax: 0086 574 5687 7589 Email: info@umateck.com Web: www.umateck.com Add: 4-1, Shanghai Fortune building, South Dongyi Rd, Zhenhai District, Ningbo, China, 315202 |
| ② | Connector | 3.5mm Female, PIN and Shell Nickel Plated, with Nut | 1 | pc | Approve: | Dell Zheng | |
| ① | Cable | 24AWG (11/0.15BC)*2C+S(28*0.10BC), Black PVC Jacket, OD:4.0±0.2mm | 200 | mm | Check: | Kelly Xu | |
| No. | P/No. | Specifications | Q'TY | Unit | Draw: | David Han | |

