



| Rev | Modification | Date       |
|-----|--------------|------------|
| A1  | Issue        | 07/13/2016 |




**Key Features:**

- High Quality DVI-I Dual Link (24+5) Female to Female Panel Mount Cable
- 45 Degree DVI connector design makes it easier installation to connect cables in tight spaces
- The screw design helps to connect the device tightly
- Convenient way to combine two DVI cables through a panel without any signal loss
- Transmit both digital and analog signals
- Support 2560x1600@60Hz resolution
- Bandwidth up to 9.9Gbps
- 2 Years Warranty

|   |                     |  |
|---|---------------------|--|
| Projection:  | Tolerance: XX= XXX= | Product: DVI-I 24+5 F/F Panel Mount Cable  |
| Scale: None   | DWG No.: PM4001     | Part No.: UMPM4001   |
| Unit: mm  | Page: 1/2           | Customer:  |
| Customer Approve:   |                     | <p><b>UMA Technology Co., Ltd</b></p> <p>Tel: 0086 574 8704 2335<br/>                     Fax: 0086 574 5687 7589<br/>                     Email: info@umateck.com<br/>                     Web: www.umateck.com<br/>                     Add: 4-1, Shanghai Fortune building, South Dongyi Rd,<br/>                     Zhenhai District, Ningbo, China, 315202</p>  |
| Approve:  | Dell Zheng          |  |
| Check:  | Kelly Xu            |  |
| Draw:   | David Han           |  |

RoHS Compliant

| Rev | Modification | Date       |
|-----|--------------|------------|
| A1  | Issue        | 07/13/2016 |

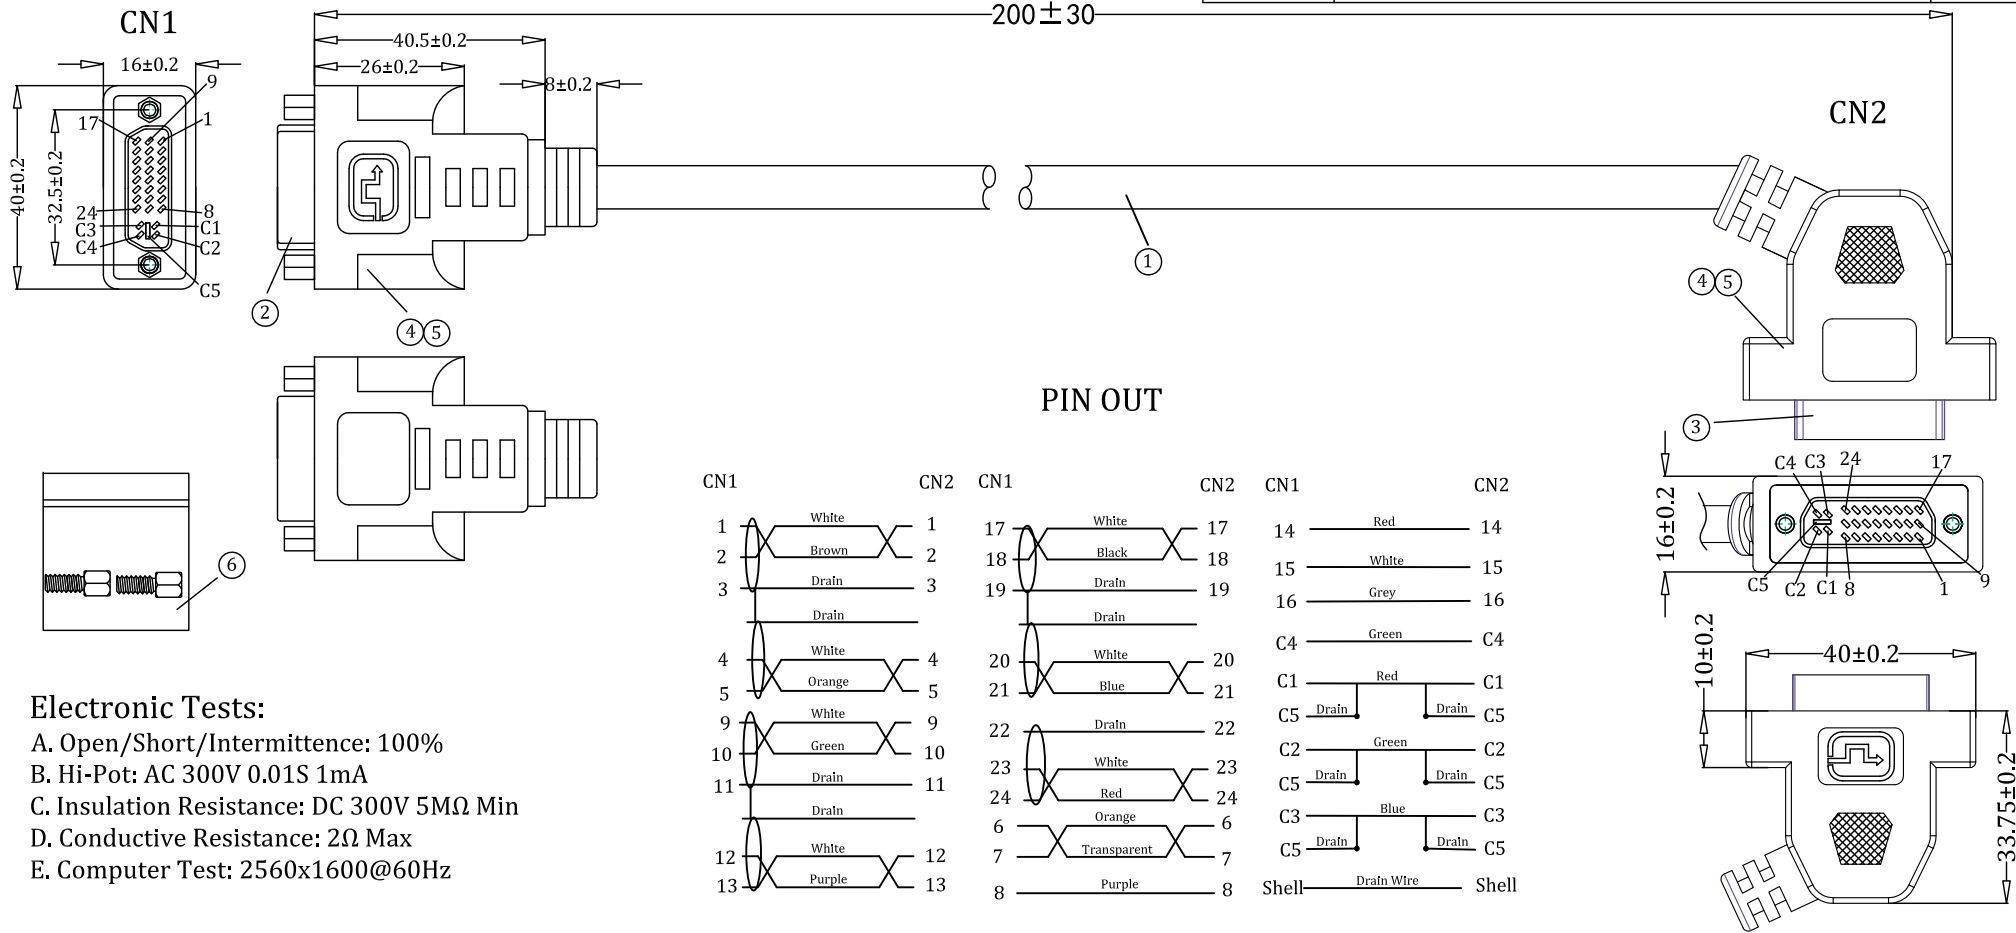

**Electronic Tests:**

- A. Open/Short/Intermittence: 100%
- B. Hi-Pot: AC 300V 0.01S 1mA
- C. Insulation Resistance: DC 300V 5MΩ Min
- D. Conductive Resistance: 2Ω Max
- E. Computer Test: 2560x1600@60Hz

|     |            |   |      |      |                     |                     |  |
|-----|------------|---|------|------|---------------------|---------------------|--|
| ⑥   | Screw      | Screw, 4-40, Nickel Plated  | 2    | pcs  |                     |                     |  |
| ⑤   | Outer Mold | 45P PVC, Black  | 38   | g    | Projection:         | Tolerance: XX= XXX= | Product: DVI-I 24+5 F/F Panel Mount Cable  |
| ④   | Inner Mold | LDPE  | 12   | g    | Scale: None         | DWG No.: PM4001     | Part No.: UMPM4001   |
| ③   | Connector  | DVI-I 24+5 Female, PIN Gold Flash, Shell Nickel Plated, with Nuts   | 1    | pc   | Unit: mm            | Page: 2/2           | Customer:  |
| ②   | Connector  | DVI-I 24+5 Female, PIN Gold Flash, Shell Nickel Plated, with Nuts   | 1    | pc   | Customer Approve:   |                     | <b>UMA Technology Co., Ltd</b><br>Tel: 0086 574 8704 2335<br>Fax: 0086 574 5687 7589<br>Email: info@umateck.com<br>Web: www.umateck.com<br>Add: 4-1, Shanghai Fortune building, South Dongyi Rd, Zhenhai District, Ningbo, China, 315202 |
| ①   | Cable      | DVI-I 24+5, [30AWG(7/0.10TC)+FPE+S(114/0.10TC)+PVC]*3C+[30AWG(7/0.10TC)*1P+D(7/0.10TC)+FAM]*7C+30AWG(7/0.10TC)*5C+30AWG(7/0.10TC)*1P+AL-Foil+D(7/0.10TC)+B(128/0.12AL-MG), Black PVC Jacket, OD:9.0± 0.2m | 200  | mm   | Approve: Dell Zheng |                     |  |
| No. | P/No.      | Specifications  | Q'TY | Unit | Check: Kelly Xu     |                     |  |
|     |            |   |      |      | Draw: David Han     |                     |  |