

Rev	Modification	Date
A1	Issue	07/13/2016



Key Features:

- HD15 VGA Female to Female Panel Mount cable
- The screw design helps to connect the device tightly
- Convenient way to combine two VGA cables through a panel without any signal loss
- Support video resolutions up to 2048x1536 (QXGA), including 1920x1200 (WUXGA), 1600x1200 (UXGA), 1680x1050 (WSXGA+), 1400x1050 (SXGA+), 1280x800 (WXGA), 1024x768 (XGA), 800x600 (SVGA), 640x480 (VGA)
- 2 Years Warranty

Projection: 	Tolerance: XX= XXX=	Product: VGA F/F Panel Mount Cable
Scale: None	DWG No.: PM5001	Part No.: UMPM5001
Unit: mm	Page: 1/2	Customer:
Customer Approve:		UMA Technology Co., Ltd Tel: 0086 574 8704 2335 Fax: 0086 574 5687 7589 Email: info@umateck.com Web: www.umateck.com Add: 4-1, Shanghai Fortune building, South Dongyi Rd, Zhenhai District, Ningbo, China, 315202 
Approve: Dell Zheng		
Check: Kelly Xu		
Draw: David Han		

RoHS Compliant

Rev


Modification

Date

A1

Issue

07/13/2016

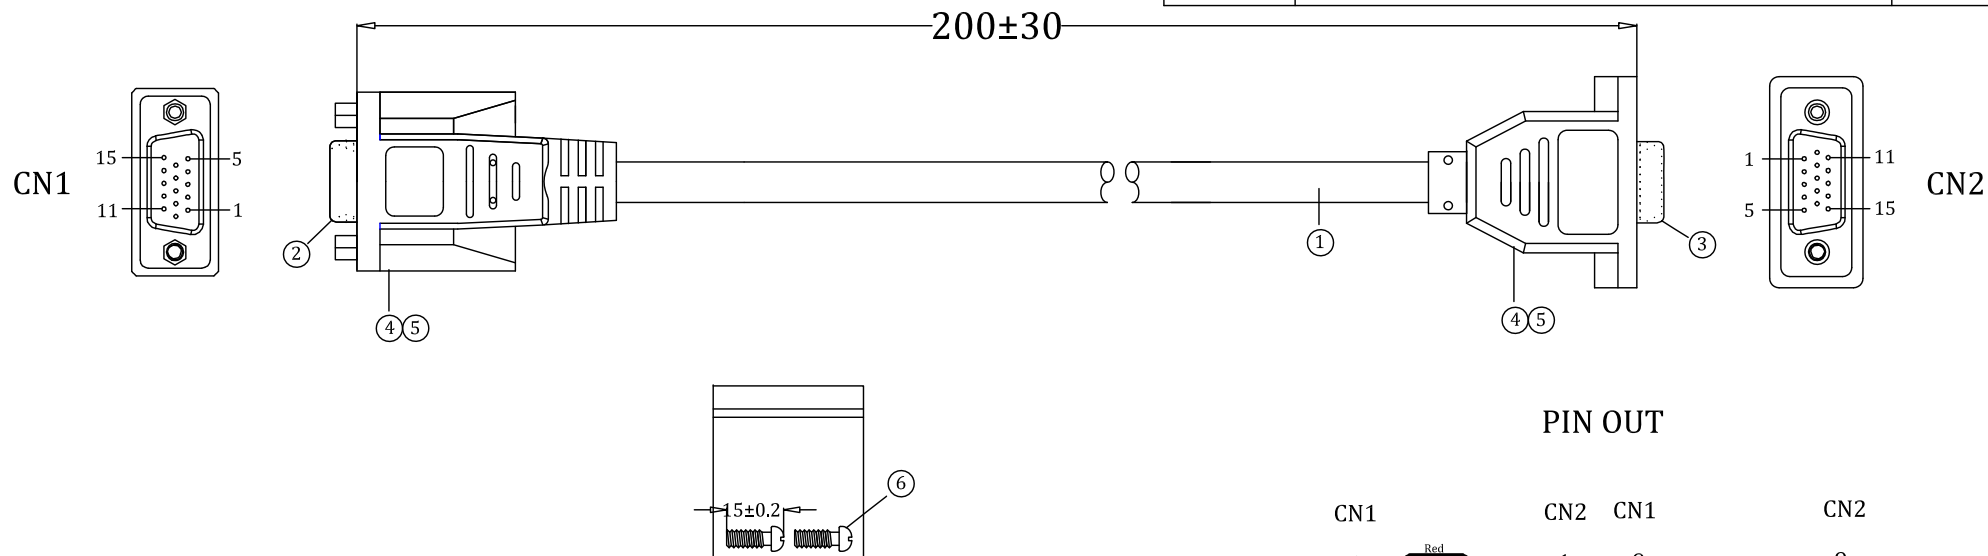

PIN OUT

CN1		CN2	CN1		CN2
1		1	9	—————	9
6		6	10	—————	10
	Drain Wire				
2		2	11	—————	11
7		7	12	—————	12
	Drain Wire				
3		3	13	—————	13
8		8	14	—————	14
	Drain Wire				
4		4	15	—————	15
5		5	Shell	—————	Shell
			Drain Wire		

Electronic Tests:

- A. Open/Short/Intermittence: 100%
 B. Hi-Pot: AC 300V 0.01S 1mA
 C. Insulation Resistance: DC 300V 5MΩ Min
 D. Conductive Resistance: 3Ω Max
 E. Computer Test: 1080P@60Hz

⑥	Screw	Screw, 4-40, Nickel Plated	2	pcs				
⑤	Outer Mold	45P PVC, Black	15	g	Projection: 	Tolerance: XX= XXX=	Product: VGA F/F Panel Mount Cable	
④	Inner Mold	LDPE	8	g	Scale: None	DWG No.: PM5001	Part No.: UMPM5001	
③	Plastic Hood	VGA 15 PIN Female, PIN Gold Flash, Shell Nickel Plated, with Nut	2	pcs	Unit: mm	Page: 2/2	Customer:	
②	Connector	VGA 15 PIN Female, PIN Gold Flash, Shell Nickel Plated, with Nut	2	pcs	Customer Approve:		UMA Technology Co., Ltd Tel: 0086 574 8704 2335 Fax: 0086 574 5687 7589 Email: info@umateck.com Web: www.umateck.com Add: 4-1, Shanghai Fortune building, South Dongyi Rd, Zhenhai District, Ningbo, China, 315202 	
①	Cable	VGA 3+9, [28AWG(7/0.12TC)+D(7/0.10TC)+Al-Foil]*3C+28AWG(7/0.12TC)*9C +AL-Foil+D(1/0.254BC)+B(80/0.12AL-MG), Black PVC Jacket, OD:8.0± 0.2mm	200	mm	Approve: Dell Zheng			
					Check: Kelly Xu			
No.	P/No.	Specifications	Q'TY	Unit	Draw: David Han			