



SPECIFICATION SHEET

UMACABLE HIGH QUALITY PROMOTIONAL HDMI CABLE


ITEM NO.: UMHD1003




KEY FEATURES :

- High Speed HDMI Cable with Ethernet
- Bandwidth up to 10.2Gbps
- Support 1920*1080@60 (1080p) video resolution
- 3D over HDMI
- Expanded support for color spaces
- HDMI CEC system control compatibility
- Lifetime Warranty

UMACABLE HIGH QUALITY PROMOTIONAL HDMI CABLE

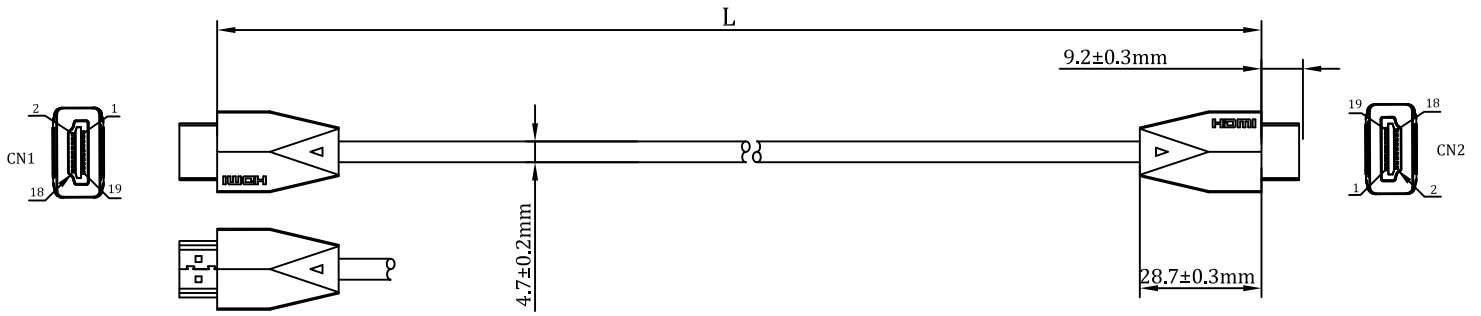


Diagram

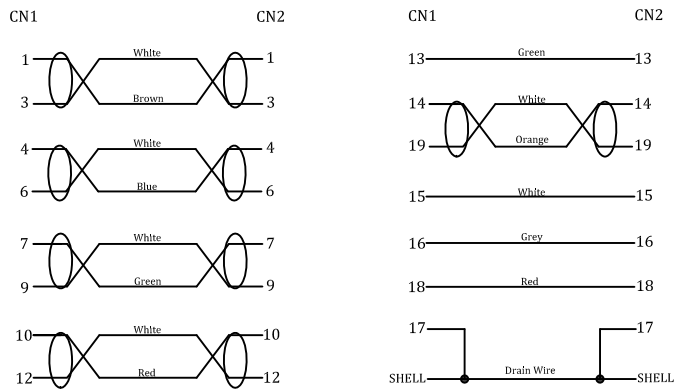

PS: PIN 2, 5, 8, 11 Not Connected

Construction

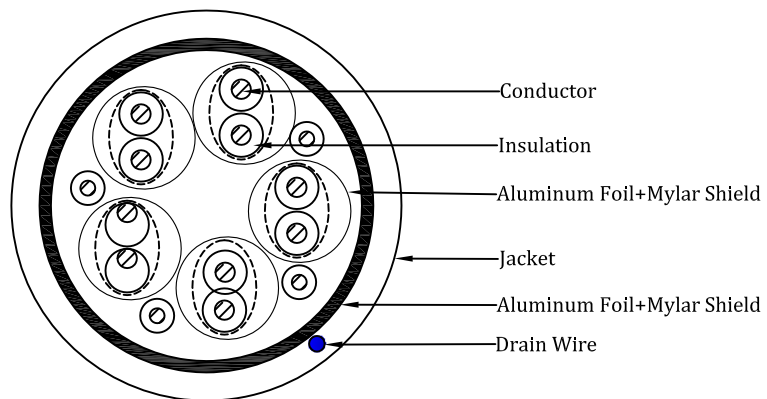

UMACABLE HIGH QUALITY PROMOTIONAL HDMI CABLE

Electrical Characteristics:

Nominal Impedance:	100±10Ω
Nominal Velocity of Propagation:	≤1.78ns
DC Resistance:	376Ω/km
Dielectric Strength:	AC 500V/1 minute
Insulation Resistance:	100Ω

Conductor 1 (5 pairs)

Conductor Type:	32AWG Copper Clad Steel
Insulation:	Foamed PE
Color:	Brown/White, Blue/White, Green/White, Red/White, Orange/White
Drain Wire:	Not contained
Shield:	Aluminum Foil+Mylar 100% Coverage

Connector 1

Connector Type:	HDMI Type A Male
PIN Construction:	Phosphor Copper
Plating:	1 μm Gold
Injection:	45P PVC

Overall

Drain Wire:	32AWG Copper Clad Steel
Foil Shield:	Aluminum Foil+Mylar 100% Coverage
Braided Shield:	Not contained
Jacket:	PVC
OD:	4.7±0.2mm

Physical Characteristics:

Voltage Rating:	30V
Maximum Bend Radius:	90mm
Temperature Rating:	80℃
Approvals:	RoHS Compliant
Package type:	PE bag, Zip bag, Box, Hang card, Blister

Conduct 2 (4 cores)

Conductor Type:	32AWG Copper Clad Steel
Insulation:	HDPE
Color:	Green, White, Grey, Red
Shield:	Aluminum Foil+Mylar 100% Coverage

Connector 2

Connector Type:	HDMI Type A Male
PIN Construction:	Phosphor Copper
Plating:	1 μm Gold
Injection:	45P PVC

Customized Parameters

Guage:	AWG 32
Length:	1, 1.5, 1.8m
Color:	Black or Customized
Ferrite Core:	Customized
Nylon Mesh:	Customized
Package type:	PE bag, Zip bag, Box, Hang card, Blister